



AIR SWITCH INSTALLATION INSTRUCTIONS

- A. Drill a 33mm wide hole into the kitchen work top, or the corner of the sink unit, at the most convenient point for use. Some sink unit may already have a suitable hole in them which can be exposed by removing the cap.
- B. Remove the nut from the push button bellows, while keeping the stainless steel washer and rubber gasket in place. Push one end of the PVC tubing onto the spout of the push button bellows, feed the other end of the tube through the hole in the work top and through the nut underneath the work top. (See 8A).
- C. Fit the push button bellows in the hole and then screw up the nut underneath the work top until it is hand tight. **DO NOT USE A WRENCH TO TIGHTEN THE NUT.** (See 8B)
- D. Take the other end of the air tube and firmly push it over the spout of the air switch, which is located at the side of air switch socket. (See 8C)

8A



8B

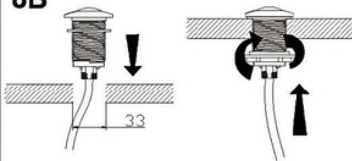

8C

