

TRINITY FLOORING SPECIFICATIONS

PRODUCT INFORMATION

CONSTRUCTION	Engineered Rigid Core Stone-Polymer Composite (SPC) with 1.2mm White Oak or Hickory Veneer
PLANK DIMENSIONS	6mm + 1mm IXPE attached pad Thickness x 5" Width x 48" Random Length
MILLING	4 sided Micro-Bevel Edge / Uniclic® Locking System
FINISH	Aluminer™ Aluminum Oxide Finish / Wire Brushed
COLOR VARIANCE	Hardwood is a natural product, thus colors and tones may vary.
INSTALLATION	Float or Glue. Above, on, or below grade.
ENVIRONMENTAL	CARB II Compliant / FloorScore® Certified / 100% Virgin PVC
WATER PERFORMANCE	Waterproof hardwood and safe to install in kitchens, bathrooms and basements.

PACKAGING


BOX WEIGHT: 42 LBS	SQFT PER BOX: 16.68	BOX DIMENSIONS: 3" x 5.5" x 48.5"
PLANKS PER BOX: Random	PACK SIZE: 42 Boxes/Pallet	PALLET DIMENSIONS: 24" x 40" x 49"

WARRANTY

FINISH	50-year Residential / 15-year Light Commercial
STRUCTURE	Lifetime Structural Warranty

RESOURCES

Download the latest versions of our installation and maintenance guides, as well as watch installation videos, at www.bhwfloors.com

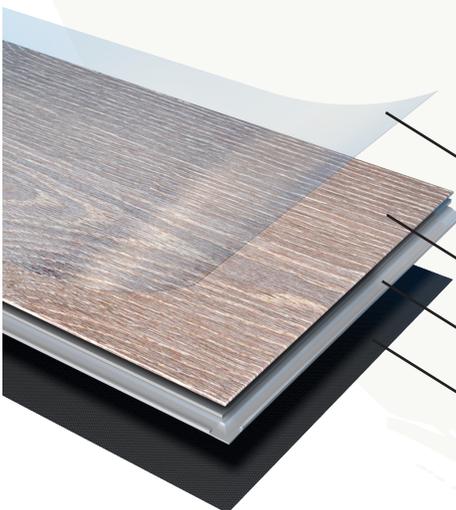

ALUMINER™
 (8 LAYERS OF PROTECTIVE COATING)
 1.2MM VENEER
 RIGID CORE SPC
 1MM IXPE PAD




BREWSTER 8000 WHITE OAK




MANSFIELD 8001 WHITE OAK



TATE 8002 WHITE OAK



PARKER 8003 WHITE OAK



DEXTER 8008 WHITE OAK



CAMERON 8004 WHITE OAK



JACOBY 8009 HICKORY



ARLET 8005 WHITE OAK



NEAH 8006 WHITE OAK



GENEVA 8007 WHITE OAK