
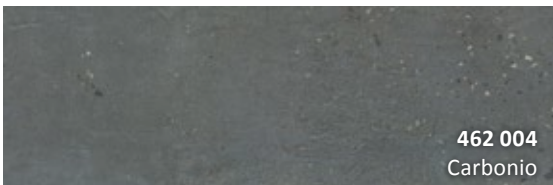


Concreto 462 & Carrara 463

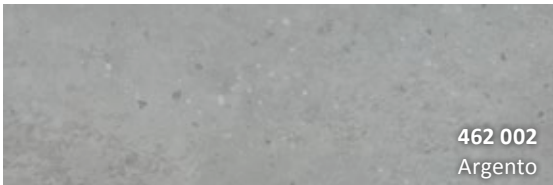

Size
12" x 36"
2.5 mm thick

Wear Layer
20 mil / UV-Cured Urethane

Edge Treatment
Four-Sided Bevel

Product Classification
ASTM F1700 Class III, Type B

Installation
Full Spread Adhesive
NEXT 1200™ recommended

Coordinating Moldings
See nextfloor.net for more details.

Packaging
21 pieces per carton (39 lbs)
42 SF per carton
54 cartons per pallet
20 pallets per container

Testing
Critical Radiant Flux
Surface Flammability
Coefficient of Friction
Static Load Limit
Sound Transmission Class (STC)
Impact Insulation Class (IIC)
High Frequency Impact Insulation Class(HIIC)
Floor Score Certified
Phthalate Free
100% Virgin PVC

ASTM E648 Class I
DOC FF 1-70 Passed
ASTM 2047 Passes > 0.6
ASTM F970 1300 lbs
ASTM E492 64
ASTM E989 69
ASTM E3222 89



Warranties
Lifetime Waterproof
Lifetime Residential Wear
25-Year Commercial Wear*
**See full warranty text at matrexxfloor.com*

Sample SKUs
Handle Boards
HB462463MX
5 per carton (70lbs)
Strap Sets
SS462463MX
5 per carton (40lbs)
Folders
3P462463MX
20 per carton (60lbs)