


Tuscan Sandstone Heavy Commercial Traffic

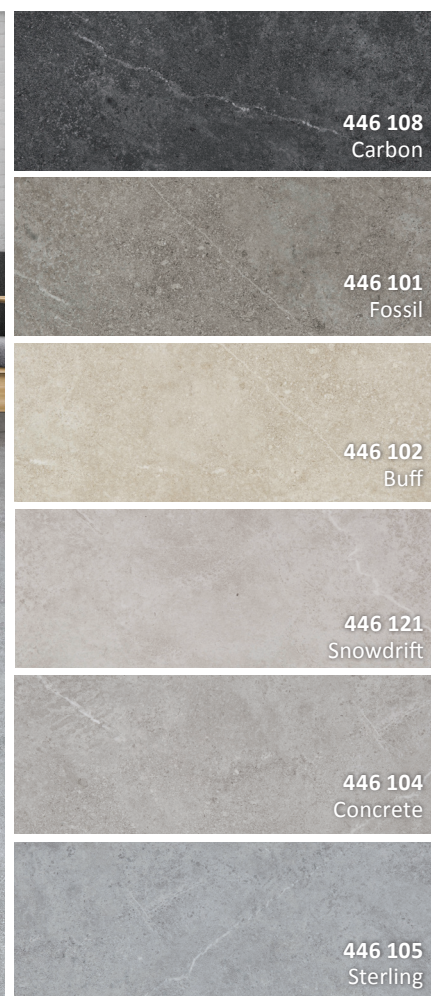

Size

12" x 24" nominal (31 cm x 62 cm)
2.5 mm thick

Wear Layer

20 mil / UV-Cured Urethane

Edge Treatment

Four-Sided Microbevel

Product Classification

ASTM F1700 Class III, Type B

Installation

Full Spread Adhesive
NEXT 1200™ recommended

Coordinating Moldings

See nextfloor.net for more details.

Packaging

21 pieces per carton (39 lbs)
42 SF per carton
54 cartons per pallet
20 pallets per container

Testing

Critical Radiant Flux	ASTM E648	Class I
Surface Flammability	DOC FF 1-70	Passed
Coefficient of Friction	ASTM 2047	Passes > 0.6
Static Load Limit	ASTM F970	1300 lbs
Sound Transmission Class (STC)	ASTM E492	64
Impact Isulation Class (IIC)	ASTM E989	69
High Frequency Impact Isulation Class (HIIC)	ASTM E3222	89
Floor Score Certified		
Phthalate Free		
100% Virgin PVC		



Warranties

Lifetime Waterproof
Lifetime Residential Wear
25-Year Commercial Wear*

*See full warranty text at nextfloor.net

Sample SKUs

Handle Boards

HB446NF
5 per carton (50 lbs)

Strap Sets

SS446NF
5 per carton (45 lbs)

Folders

3P446NF
*Includes Invincible Carpet
20 per cartons (50 lbs)

