




# Reposado®

Classification	ASTM F 1700-04 Class III, type A or B Solid Vinyl Floor Tile
Size*	7" x 48" / 178 mm x 1220 mm
Overall Thickness*	0.08" / 2.0 mm (nom)
Wear Layer	8 mil / 0.20 mm featuring <b>Tuff Shield®</b> finish
Edge	Square
Standard Colors	4 colors
Installation Method	Glue-Down
Wear Limited Warranty	20-Years Residential / 10-Years Light Commercial
Recycled Content	This product does not contain recycled content.
Packaging	51.34 ft <sup>2</sup> (4.77 m <sup>2</sup> ) per carton 22 pieces per carton 60 cartons per pallet
Weight Per Carton	37.70 lbs / 17.10 kg

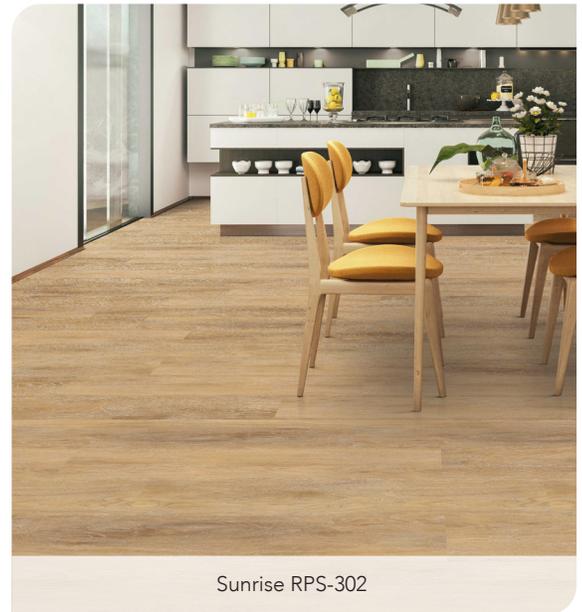

Sunrise RPS-302

## Product Testing

Chemical Resistance	ASTM F 925	Passed
Critical Radiant Flux	ASTM E 648	Class I, CRF ≥0.91
Dimensional Stability	ASTM F 2199	Passed
Flexibility	ASTM F 137	Passed
Resistance to Heat	ASTM F 1514	Passed
Resistance to Light	ASTM F 1515	Passed
Smoke Density	ASTM E 662	Passed
Static Load Limit	ASTM F 970	Passed
Thickness	ASTM F 386	Passed
+STC Sound Testing	ASTM E 90 / E 413	+STC 61
+IIC Sound Testing	ASTM E 492 / E 989	+IIC 64



Paloma RPS-301



Sunrise RPS-302



Matador RPS-303



Siesta RPS-304

\*All measurements are nominal. +Sound Testing will vary depending on the specific floor/ ceiling assembly.

Samples are intended to be a reference for product visuals and may not represent all color, shade, pattern, and texture variations. Actual product may differ from small swatches, printed media, or digital computer images.

Please visit [www.earthwerks.com](http://www.earthwerks.com) for full warranty details and installation guidelines. All specifications and offerings subject to change without notice.