



# Trenta

## SPC COLLECTION



LI-SP01 Candela Amber

The Trenta collection replicates the beauty of natural wood with wood grain embossed decorative film on its surface. Its high-standard 20 mil wear layer provides essential scratch resistance, and its rigid core SPC material offers superior stability and a long-lasting lifespan. The Trenta collection has attached acoustic padding that works as a sound suppressant and is essential for shock absorption. The planks are made from 100% eco-friendly ingredients and are entirely formaldehyde free.



Waterproof



Indent Resistant



Sound Tested



Pet Friendly



Formaldehyde Free



Phthalate Free

### SPECIFICATIONS

Material Type	SPC	Pad Type	Antibacterial + Acoustic	Per Box	6 pieces	22.88 sq.ft.	50 lbs.
Plank Size	5' x 9"	Edge Profile	Painted Bevel	Pallet	52 boxes	1,189.52 sq.ft.	2,650 lbs.
Total Thickness	6.5 mm	Installation Type	Floating	Container	936 boxes	21,411 sq.ft.	
Core Thickness	5 mm	Click System	Uniclic				
Wear Layer	20 mil	Plank Repeat	5				
Attached Pad	Yes	Texture/Style	Wood Grain Embossed				
Pad Thickness	1.5 mm	Finish	UV Acrylic				



CERTIFIED BY  
SCS Global Services


## COLORS



LI-SP01 Candela Amber



LI-SP02 Bliss

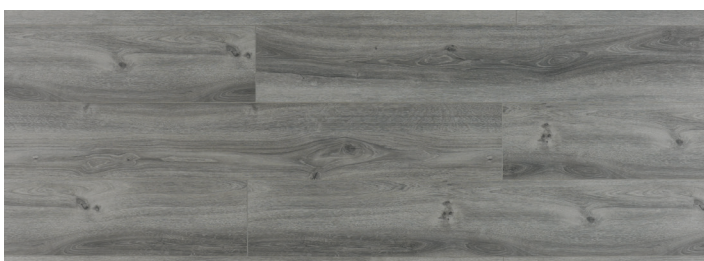


LI-SP03 Crown Pebble



LI-SP04 Daisy Pearl



LI-SP07 Nightingale

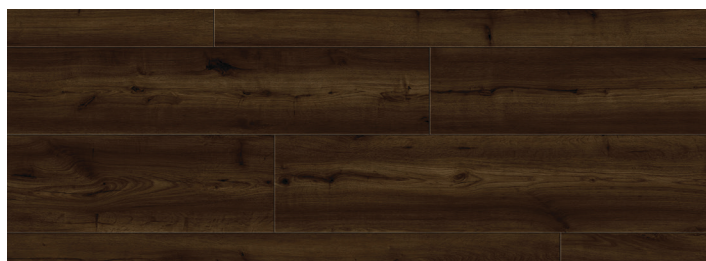

LI-SP12 Hibiki

## MOULDINGS



End Cap



Flush Stair Nose



Quarter Round



Reducer



T-Moulding

## TESTING

ASTM E648	Fire Rating	Class 1	ASTM F410	Average Wear Layer Thickness	20.7 mil
ASTM D2047	Coefficient of Friction	Standard Neolite 1.02	ASTM F2199	Dimensional Stability, Curl After Heat	Passes
ASTM F970	Static Load Limit	0.004 in.	ASTM F1914	ASTM F2199	Passes
E492	IIC - Impact Sound Rating	61 db	ASTM F1514	Resistance to Heat	Passes
E90	STC - Sound Transmission Loss	53 db	ASTM F1514	Resistance to Light	Passes
ASTM F387	Overall Thickness	0.264 in.	Phthalate Free		Floor Score Certified