




Reposado® Plus

Classification	ASTM F 1700-04 Class III, type A or B Solid Vinyl Floor Tile
Size*	7" x 48" (nom)
Overall Thickness*	3.5 mm (2.5 mm + 1 mm cushion backing)
Wear Layer	12 mil / 0.30 mm featuring Tuff Shield finish
Edge	Square
Standard Colors	4 colors
Installation Method	Glue-Down
Wear Limited Warranty	30-Year Residential / 20-Years Light Commercial
Recycled Content	This product does not contain recycled content.
Packaging	32.67 ft² (3.04 m²) per carton 14 pieces per carton 60 cartons per pallet
Weight Per Carton	34.87 lbs / 15.82 kg

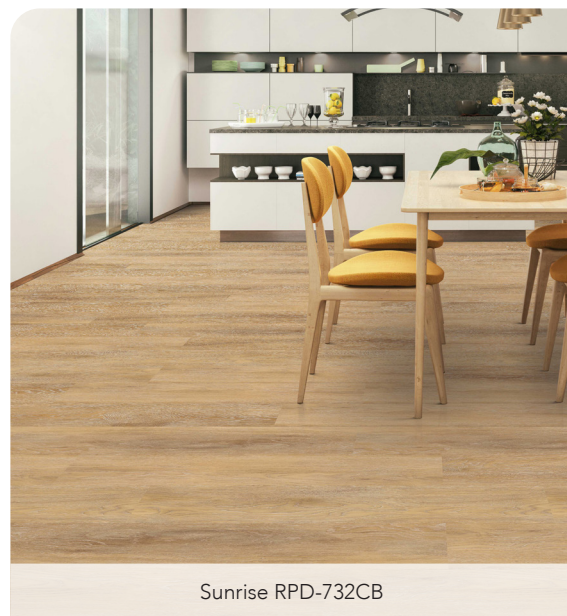

Product Testing


Chemical Resistance	ASTM F 925	Passed
Critical Radiant Flux	ASTM E 648	Class I, CRF ≥0.45
Dimensional Stability	ASTM F 2199	Passed
Flexibility	ASTM F 137	Passed
Resistance to Heat	ASTM F 1514	Passed
Resistance to Light	ASTM F 1515	Passed
Smoke Density	ASTM E 662	Passed
Static Load Limit	ASTM F 970	Passed
Thickness	ASTM F 386	Passed
STC Sound Testing	ASTM E 90 / E 413	STC 62
IIC Sound Testing	ASTM E 492 / E 989	IIC 72



BEST I WEAR LIMITED WARRANTY




Paloma RPD-731CB



Matador RPD-733CB



Sunrise RPD-732CB



Siesta RPD-734CB

*All measurements are nominal. Sound Testing will vary depending on the specific floor/ ceiling assembly.

Samples are intended to be a reference for product visuals and may not represent all color, shade, pattern, and texture variations. Actual product may differ from small swatches, printed media, or digital computer images.

Please visit www.earthwerks.com for full warranty details & installation guidelines. All specifications & offerings are subject to change without notice.